



**TABLE OF PERMISSIBLE LOADS**



Light (mt)	Load (kg)	Central deflection (mm)	Load (kg)	Total Load (kg)	Central deflection (mm)	Load (kg)	Total Load (kg)	Central deflection (mm)
16	50	142	20	60	142	5	80	142
15	55	125	22	66	125	6	90	125
14	62	106	25	74	106	7	98	106
13	74	93	30	89	93	9	117	93
12	90	83	36	108	83	12	144	83
11	105	69	42	126	69	15	165	69
10	125	59	50	150	59	20	200	59
9	160	51	64	192	51	28	252	51
8	190	42	76	228	42	38	304	42
7	240	35	96	288	35	55	385	35
6	300	26	120	360	26	80	480	26
5	350	17	140	420	17	110	550	17
4	390	10	156	468	10	150	600	10
3	470	5	188	564	5	240	720	5

The calculation at the base of the table has been prepared in accordance with the UNI EN 1999-1-1. The book values shown are net of the weight of the single span. The arrow includes the weight of the single span. The framework must be considered as an ideal condition, will be the customer will analyze the structure in the light of the actual conditions of load, constraint and use

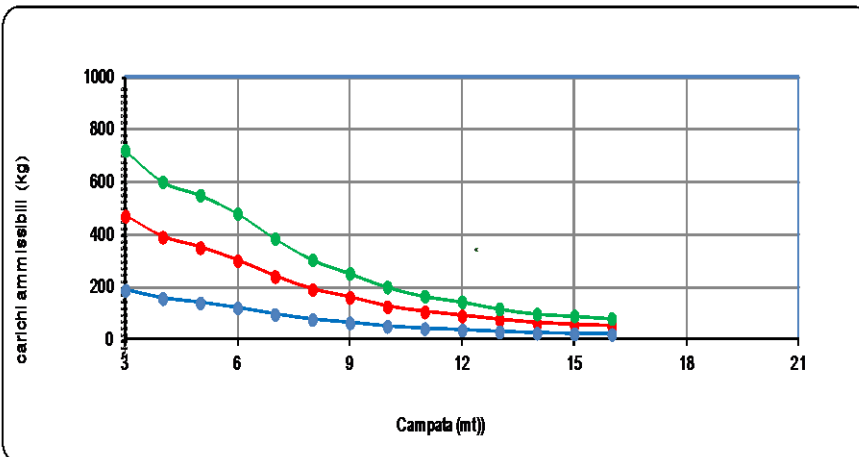

uniform load  
 Load L/2  
 Load L/4