
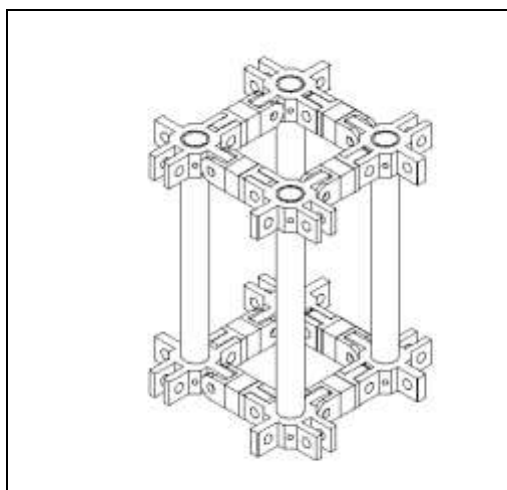


2 – 4 way box corner (8 nodules)
Raccordo configurabile da 2 a 4 vie (8 nodi)

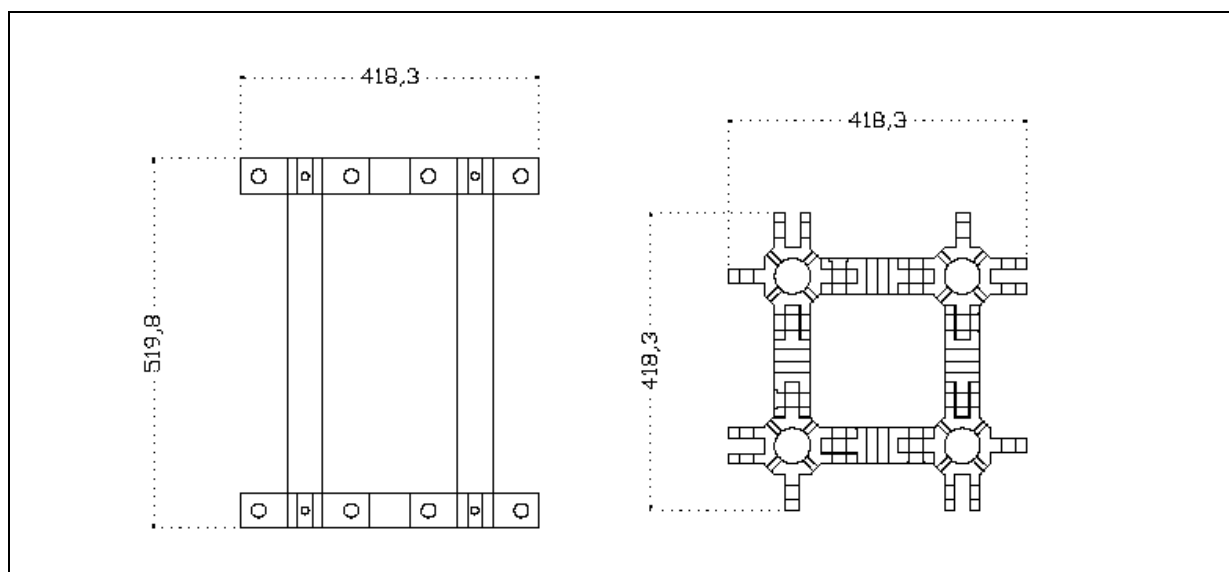

TECHNICAL DATA

Dimension	520 x 418 x 418 mm
Material	Aluminium EN AW 6082 T6
Ends	Aluminium casting plate EN AC-42200 T6
Connection	K52
Weight	26.00 kg
Welding	TIG UNI EN 9606-2:2006
Main tubes	Ø 50x4 mm
volume	0.091 mc

INERTIAL PROPERTIES

Area / Area	(A)	34.4	cm ²
Elastic modulus / Modulo Elastico	(E)	700.000	Kg / cm ²
Moment of inertia / Momento d'inerzia	(Iy)	12812	cm ⁴
Moment of inertia / Momento d'inerzia	(Ix)	3340	cm ⁴
Elastic section modulus / Modulo di resistenza elastico	(Wy)	493	cm ³
Elastic section modulus / Modulo di resistenza elastico	(Wx)	230	cm ³