
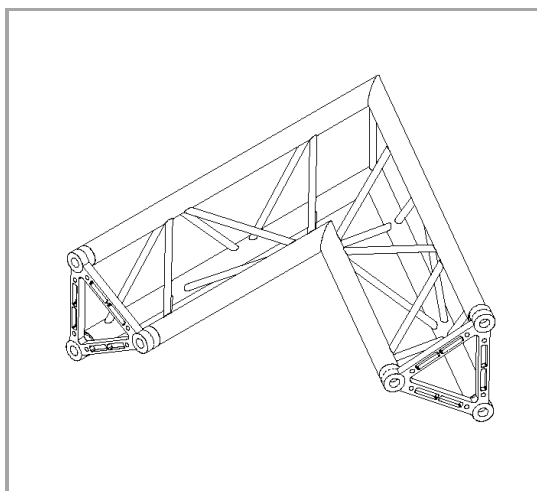


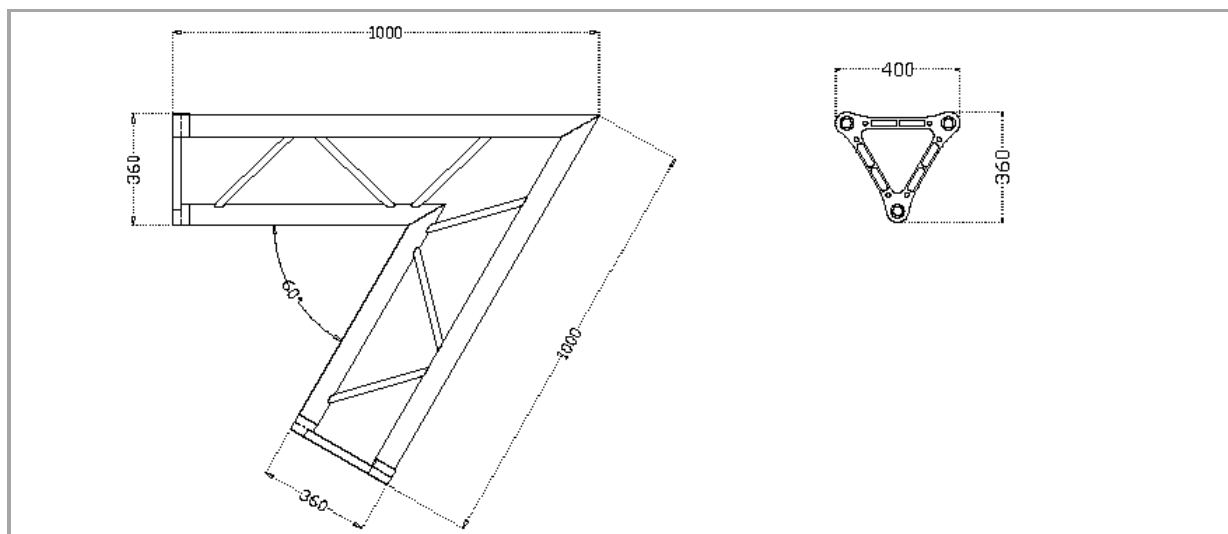

#### TECHNICAL SPECIFICATION

|                   |                                           |
|-------------------|-------------------------------------------|
| <b>Section</b>    | Triangular 40 cm long sides               |
| <b>Material</b>   | Aluminium EN AW 6082 T6                   |
| <b>Ends</b>       | Aluminium casting plate<br>EN AC-42200 T6 |
| <b>Connection</b> | SSF03 – KB6                               |
| <b>Weight</b>     | 7.40 kg                                   |
| <b>Welding</b>    | TIG UNI EN 9606-2:2006                    |
| <b>Main tubes</b> | Ø 50x3 mm                                 |
| <b>Diagonals</b>  | Ø 30x3 mm                                 |

#### INERTIAL PROPERTIES

|                                                                |      |         |                      |
|----------------------------------------------------------------|------|---------|----------------------|
| <b>Area</b> / Area                                             | (A)  | 13.26   | cm <sup>2</sup>      |
| <b>Elastic modulus</b> / Modulo Elastico                       | (E)  | 700.000 | Kg / cm <sup>2</sup> |
| <b>Moment of inertia</b> / Momento d'inerzia                   | (Iy) | 3185    | cm <sup>4</sup>      |
| <b>Moment of inertia</b> / Momento d'inerzia                   | (Ix) | 3160    | cm <sup>4</sup>      |
| <b>Elastic section modulus</b> / Modulo di resistenza elastico | (Wy) | 159     | cm <sup>3</sup>      |
| <b>Elastic section modulus</b> / Modulo di resistenza elastico | (Wx) | 159     | cm <sup>3</sup>      |