
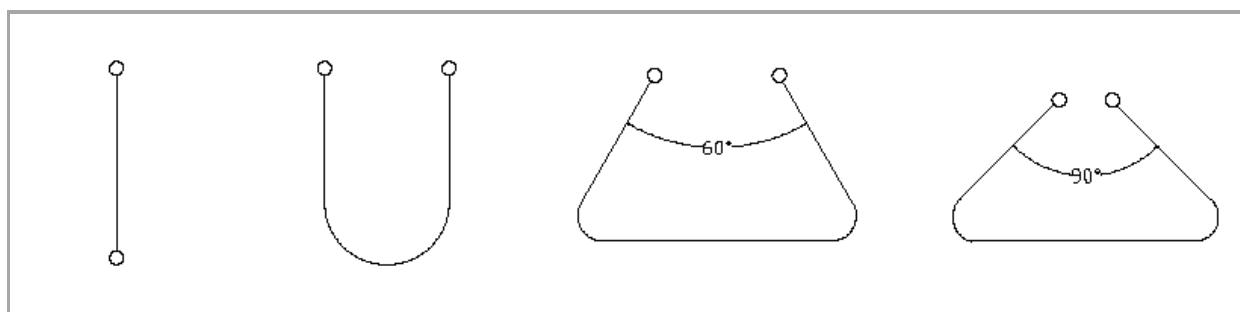


Cavo in acciaio Ø 10 mm con anima metallica e redance
Steel cable Ø 10 mm with metal thimbles and redance

CR10/500M

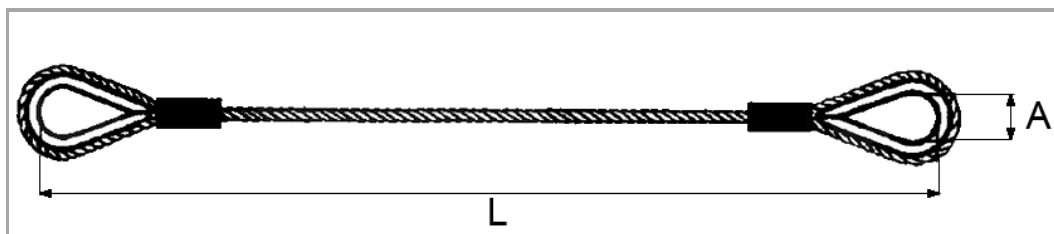

Sollevamento dritto / lift right

Parallela/ parallel

$\beta = \text{da } 0^\circ \text{ a } 60^\circ$

$\beta = \text{da } 60^\circ \text{ a } 90^\circ$

Descrizione Description	Cavo in acciaio Ø 10 mm con anima metallica e redance Steel cable Ø 10 mm with metal thimbles and redance
Spessore thickness	10 mm
Carico Massimo sollevamento dritto Max load lift right	1160 kg
Carico Massimo Parallela Max load parallel	2320 kg
Carico massimo $\beta = \text{da } 0^\circ \text{ a } 60^\circ$ Max load	1620 kg
Carico massimo $\beta = \text{da } 60^\circ \text{ a } 90^\circ$ Max load	1160 kg
Lunghezza Length	5.00 m