
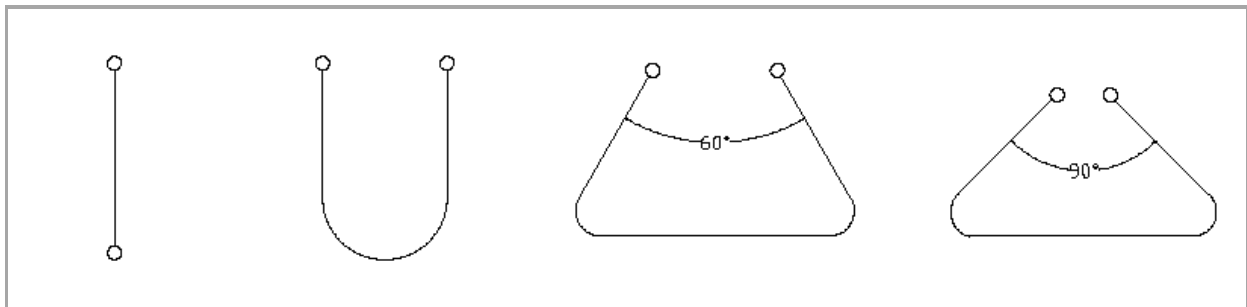


Cavo in acciaio Ø 5 mm con anima tessile e redance  
 Steel cable Ø 5 mm with fiber core and thimbles

CR5/060T

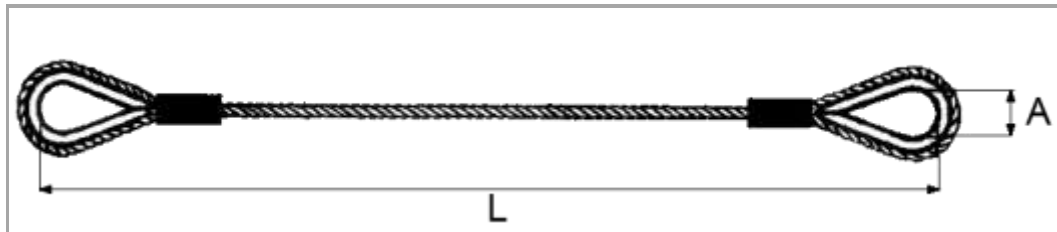

Sollevamento dritto / lift right

Parallela/ parallel

$\beta = \text{da } 0^\circ \text{ a } 60^\circ$

$\beta = \text{da } 60^\circ \text{ a } 90^\circ$

<b>Descrizione</b> <i>Description</i>	Cavo in acciaio Ø 5 mm con anima metallica e redance <i>Steel cable Ø 5 mm with metal thimbles and redance</i>
<b>Spessore</b> <i>thickness</i>	5 mm
<b>Carico Massimo sollevamento dritto</b> <i>Max load lift right</i>	250 kg
<b>Carico Massimo Parallela</b> <i>Max load parallel</i>	500 kg
<b>Carico massimo <math>\beta = \text{da } 0^\circ \text{ a } 60^\circ</math></b> <i>Max load</i>	430 kg
<b>Carico massimo <math>\beta = \text{da } 60^\circ \text{ a } 90^\circ</math></b> <i>Max load</i>	350 kg
<b>Lunghezza</b> <i>Length</i>	0.60 mt