
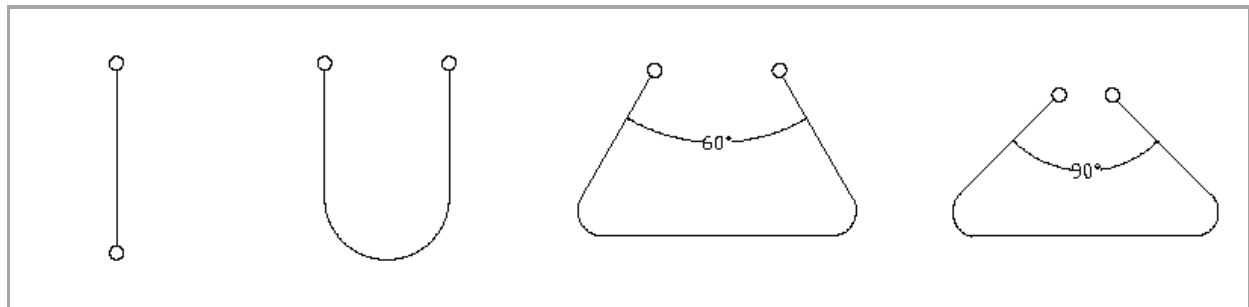


Cavo in acciaio Ø 5 mm con anima tessile e redance
 Steel cable Ø 5 mm with fiber core and thimbles

CR5/080T

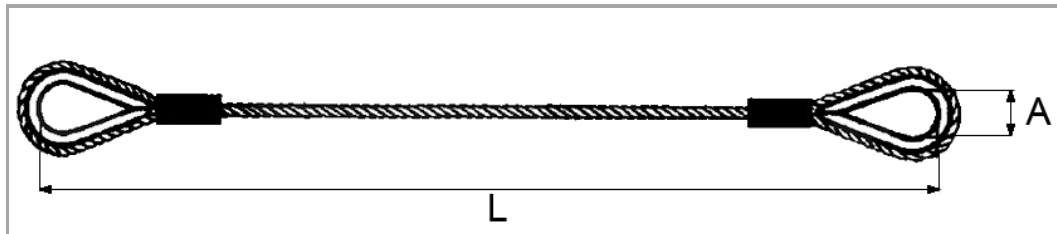

Sollevamento dritto / lift right

Parallela/ parallel

$\beta = \text{da } 0^\circ \text{ a } 60^\circ$

$\beta = \text{da } 60^\circ \text{ a } 90^\circ$

Descrizione <i>Description</i>	Cavo in acciaio Ø 5 mm con anima metallica e redance <i>Steel cable Ø 5 mm with metal thimbles and redance</i>
Spessore <i>thickness</i>	5 mm
Carico Massimo sollevamento dritto <i>Max load lift right</i>	250 kg
Carico Massimo Parallela <i>Max load parallel</i>	500 kg
Carico massimo $\beta = \text{da } 0^\circ \text{ a } 60^\circ$ <i>Max load</i>	430 kg
Carico massimo $\beta = \text{da } 60^\circ \text{ a } 90^\circ$ <i>Max load</i>	350 kg
Lunghezza <i>Length</i>	0.80 mt